



ULTRADOCK™

The Ultimate in High Speed Flexible Doors

The self-repairing and low profile R-Bac™ UltraDock™ door is the same high quality door that you've come to expect from R-Bac™. It is ideally suited for industrial and commercial applications where space is at a premium and a lower cost, lower speed solution is needed.



Speed

UltraDock™ opens at up to 24 inches per second.

Operator

Jackshaft operator is standard with manual chain hoist optional.

Visibility

UltraDock™ offers full width vision standard.

Panel Material

Vinyl material is standard in blue with two ply and three ply monofilament optional.

Maintenance

The self-repairing UltraDock™ is designed to be low maintenance and cycle hundreds of thousands of times.

Low Profile


Projects less than 4 inches from the wall with side clearance of less than 7 inches required.



R-Bac doors are Ultra-Tough, Ultra-Reliable and Ultra-Affordable. E-mail or call us today.

ULTRADOCK™

R-BAC 's self-repairing UltraDock™ high speed industrial doors are tough, built to last and engineered to cycle hundreds of thousands of times.

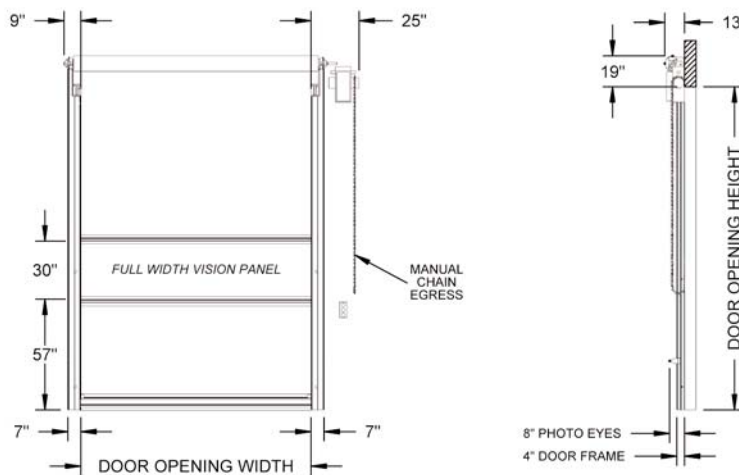


BacFlap™ Auto-Reset System

When impacted the door panel will automatically reset itself. BacFlaps™ insure against panel tearing.



Patent Pending Modular Design

The R-Bac™ patent pending extrusion design allows for easy maintenance and repair in the field.



BacTrack™ Soft Bottom Bar (Optional)

Fully padded safety bottom bar. Automatically resets after impact. Self-repairing.



BacSeal™ Weather Seal

Double seal on the back spreader bar and double seal on the front extrusions. When the door is down, the panel is sealed.



Low Profile

Projects less than 4 inches from the wall with side clearance of less than 7 inches required.



doors are Ultra-Tough, Ultra-Reliable and Ultra-Affordable. E-mail or call us today.