



ULTRALITE™

The Ultimate in High Speed Flexible Doors

The self-repairing and low profile R-Bac™ UltraLite™ high speed door is ideally suited for industrial and commercial applications where traffic conditions are moderate and space is at a premium. The door can be applied in either interior or exterior applications where moderate wind and/or negative pressure are a problem. The R-Bac™ UltraLite™ is designed to last. It is fast, safe, low cost to maintain and can take a hit.



Speed

UltraLite™ opens at up to 60 inches per second.

Controls

R-Bac's™ UltraSmart™ Controller is people friendly and extremely intuitive. Optional integrated rotary disconnect available on the control box.

Visibility

UltraLite™ offers full width vision standard.

Panel Material

Vinyl material is standard in blue with two ply and three ply monofilament optional.

Maintenance

The self-repairing UltraLite™ is designed to be low maintenance and cycle hundreds of thousands of times.

Wireless Safety System

Eliminate coil cords with R-Bac's™ optional patent pending wireless safety system.

Low Profile


Projects less than 4 inches from the wall with side clearance of less than 7 inches required.



doors are Ultra-Tough, Ultra-Reliable and Ultra-Affordable. E-mail or call us today.

ULTRALITE™

R-BAC's self-repairing UltraLite™ high speed industrial doors are tough, built to last and engineered to cycle hundreds of thousands of times.

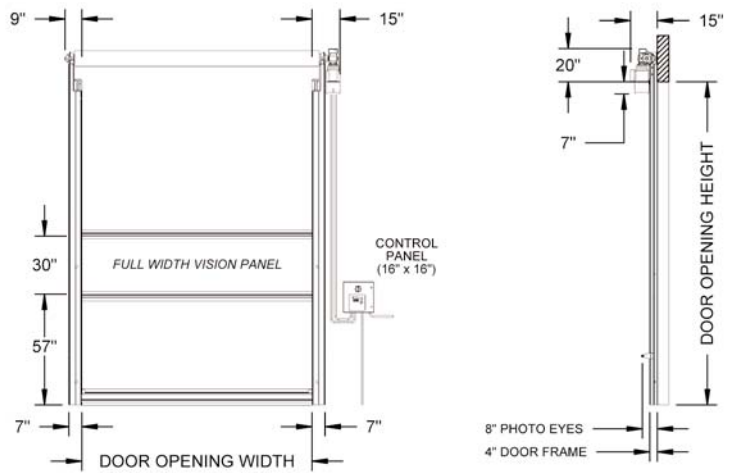


BacFlap™ Auto-Reset System

When impacted the door panel will automatically reset itself. BacFlaps™ insure against panel tearing.




UltraSmart™ Controller

UltraSmart™ walks you through problems on the control screen. Modular components minimize cost and improve reliability.



Patent Pending Modular Design

The R-Bac™ patent pending extrusion design allows for easy maintenance and repair in the field.



BacTrack™ Soft Bottom Bar (Optional)

Fully padded safety bottom bar. Automatically resets after impact. Self-repairing.




Wireless Safety System (Optional)

Cut your cord with R-Bac's™ patent pending Wireless Safety System and eliminate costly repairs and downtime associated with coil cords.



BacSeal™ Weather Seal

Double seal on the back spreader bar and double seal on the front extrusions. When the door is down, the panel is sealed.



Low Profile

Projects less than 4 inches from the wall with side clearance of less than 7 inches required.



doors are Ultra-Tough, Ultra-Reliable and Ultra-Affordable. E-mail or call us today.